


Power Generation System

/ Integrated Starter Generator and Integrated Power Supply Unit



Features

- Magnet-Motor's Power Generation System, comprised of an Integrated Starter Generator (ISG) and Integrated Power Supply (IPS) unit, is designed to meet on board and exportable electric power requirements.
- This system provides engine startup and power generation and includes easily realized performance boost and power upgrade capabilities. The system is suitable for military applications with high electric power demand, as well as hybrid electric vehicles.

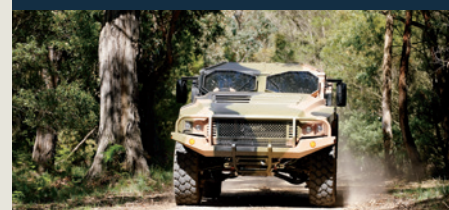

Hawkei photo courtesy of Thales

Technical Information (dependent on variant)

Integrated Starter Generator specifications

General

Engine flange/gear flange	SAE3/SAE3
Length between engine and gear	92 mm
Total length	159 mm
Outer diameter (excluding terminal box)	470 mm
Weight	65 kg
Rated voltage	3-phase 316 VRMS
Nominal speed	4,300 rpm
Max speed short time (2 min.)	4,700 rpm
Maximum cranking torque	beyond 500 Nm
Continuous torque	230 Nm

Performance @ IPS

Continuous generator power @ 1,600 to 3,000 rpm	35 kW
Continuous generator power @ 800 to 4,300 rpm	> 20 kW
Peak generator power @ 800 to 4,300 rpm	35 kW
Cranking torque @ 200 rpm	400 Nm

Electrical Interface

Signal and power connections	MIL-DTL-38999 Series III or technically equivalent
------------------------------	--

Cooling

Cooling medium	water/glycol 50/50
Nominal flow rate	3.5 l/min
Working pressure	max 3 Bar
Maximum inlet temperature	75°C
Pressure drop	0.19 Bar
Connectors	G 3/4 in.

Integrated Power Supply specifications

General

Dimensions excluding connectors	716 L x 567 W x 138 H mm
Weight	79 kg

Electrical Data – 28 V Interface

Continuous power output @ 28 V	17 kW
Continuous output current	607 A
Output voltage quality	MIL-STD-1275D
Maximum current draw from battery for cranking	800 A

Electrical Data – 180 V Interface

Continuous power output @ 180 V	13 kW
Output voltage quality	MIL-STD-704F
Customer specific power output (depending on voltage quality)	up to 30 kW

Electrical Connectors

All signal and power connections	MIL-DTL-38999 Series III or technically equivalent
----------------------------------	--

Cooling

Cooling medium	water/glycol 50/50
Nominal flow rate	13 l/min
Working pressure	max 2 Bar
Inlet temperature	-32 to +70°C
Pressure drop	0.34 Bar
Connectors	2 x G 3/4 in.

Signal Interface

CAN bus	J1939
---------	-------

Power Generation System


Technical Characteristics

- Engine start and onboard power supply
- Replaces starter motor and alternators, belts, fixtures, wiring and flywheel
- Integrated design, compact, water cooled
- Developed and qualified to MIL-STDs
- Engine cranking 400 Nm
- Continuous 30 kW power generation already at low engine speeds
- CAN J1939 interface
- IP 66/67 – 1m fording depth + water spray proof
- Compliant with MIL-STD 461F, 1275D, 810G, 704F
- Robust and reliable – full environmental protection, tested to harsh military standards
- Maintenance-free – no belts, brushes, bearings, lubricants
- High and efficient power generation at low engine speeds


Dimensions

Integrated Starter Generator (ISG)

Front View

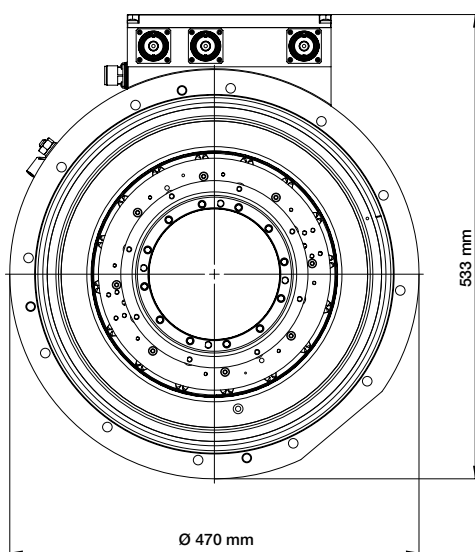


Side View

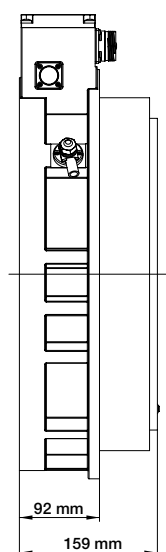


Dimensions

Integrated Power Supply (IPS)

Side View



Top View

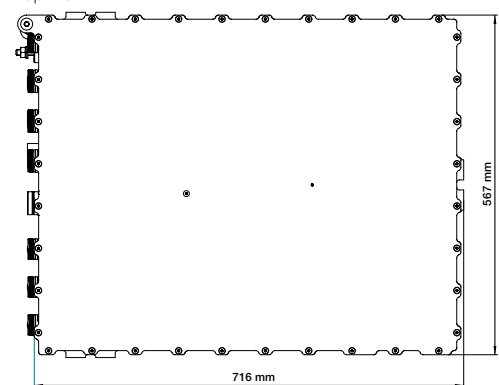

Trusted Partner.

RENK Magnet-Motor GmbH

Petersbrunner Str. 2
82319 Starnberg
Germany
P +49 8151 262-0
F +49 8151 262-250
E mobility.solutions@renk.com

Details provided about the properties and usability of the products are purely for information purposes and do not constitute a guarantee of these characteristics. The extent of goods delivered is determined by the subject matter of the specific contract. No liability accepted for errors or omissions. Subject to technical alterations. © RENK Magnet-Motor GmbH 2023